



FOOD ENERGY EFFICIENT
EURONEO FOOD ENERGY AND RECYCLE PVT. LTD.

WASTE RECYCLE

WHAT WE RECYCLE

BATTERY, CAPABLE, MOTOR, RADIATOR, CIRCUIT
BOARD, HOME APPLIANCE, TIRE, PACK CONTAINER,
DOMESTIC WASTE ETC







FOOD ENERGY EFFICIENT
EURONEO FOOD ENERGY AND RECYCLE PVT. LTD.

SINGLE SHAFT SHREDDERS

RANGE OF RECYCLE

WIRE & CABLE - WOOD SCRAP - CIRCUIT BOARD - WASTE
PAPER - PLASTIC - PE PIPE - ALUMINIUM - WOVEN BAG -
SOLID REFUSE - FILM

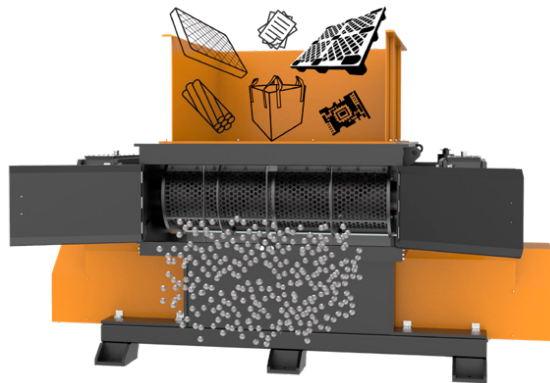


WWW.EUROENERGYNRECYCLE.COM



FOOD ENERGY EFFICIENT
EURONEO FOOD ENERGY AND RECYCLE PVT. LTD.

STRUCTURE SHREDDERS

1. **RACK BOX**
2. **SHREDDED SPINDLE**
3. **HYDRAULIC COUPLING**
4. **GEARBOX.**
5. **MOTOR**
6. **PUSHING DEVICE.**
7. **HYDRAULIC SYSTEM.**
8. **FEED HOPPER.**
9. **BELT COVER.**
10. **TRIANGLE BELT.**

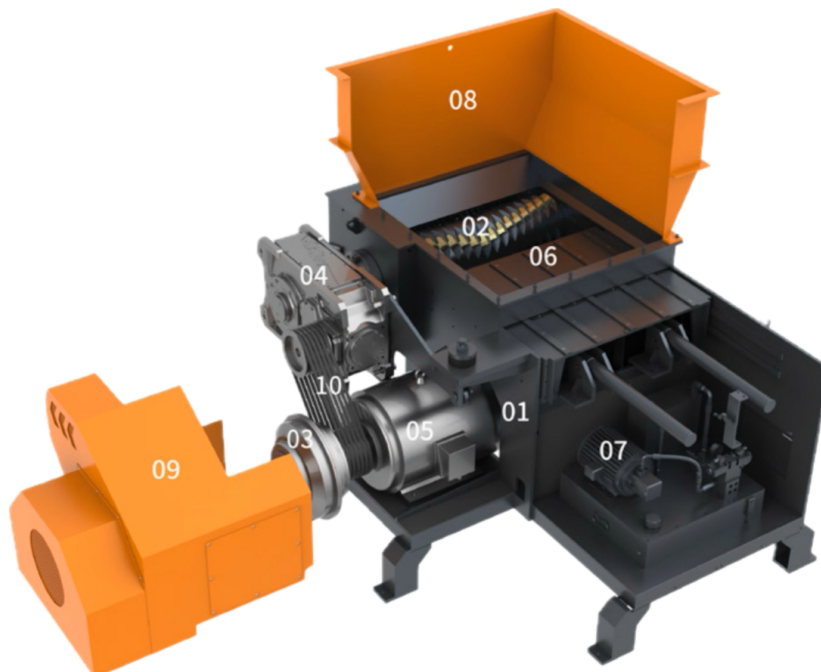




FOOD ENERGY EFFICIENT
EURONEO FOOD ENERGY AND RECYCLE PVT. LTD.

STRUCTURE SHREDDERS




PUSHING DEVICE

SHREDDED SPINDLE

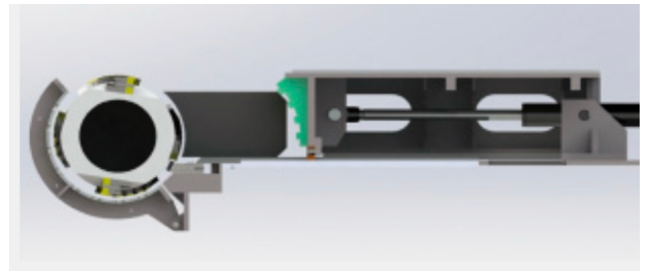

SCREEN

POWER DEVICE

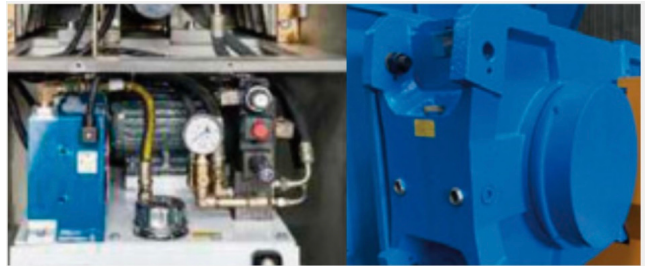

1. **CUTTING CHAMBER - 650 TO 3000 MM**
 2. **MOTOR POWER - 20+1.5 - 265-400 KW**
 3. **FEED PORT DIMENSION - 1200/900 - 3000/1500 MM**
 4. **DISCHARGE HEIGHT 460 - 950 MM.**
 5. **DIMETION - 1850/1400/1700-5400/3400/3550 MM(LWH)**
-




FOOD ENERGY EFFICIENT
EURONEO FOOD ENERGY AND RECYCLE PVT. LTD.

SINGLE SHAFT SHREDDERS

CONVENTIONAL

1. CUTTING CHAMBER - 650 TO 3000 MM
2. MOTOR POWER - 20+15 TO 265-400 KW
3. FEED PORT DIMENSION - 1200/900 TO 3000/1500 MM
4. DISCHARGE HEIGHT 460 TO 950 MM.
5. DIMENSION - 1850/1400/1700 TO 5400/3400/3550 MM (LWH)

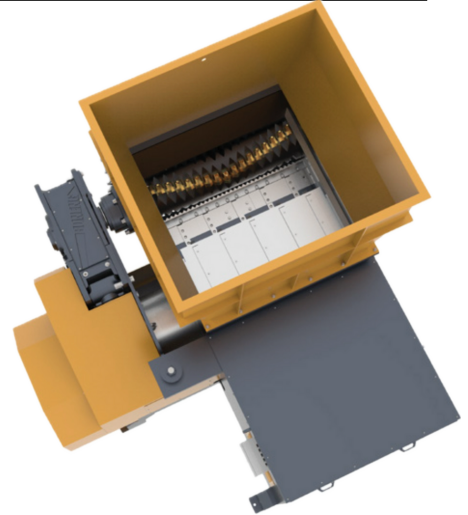


SWING PUSHER

1. CUTTING CHAMBER - 1400 TO 3000 MM
2. MOTOR POWER - 90+5.5 TO 264-400 KW
3. FEED PORT DIMENSION - 1800/1800 TO 3200/2000 MM
4. DISCHARGE HEIGHT 700 TO 950 MM.
5. DIMENSION - 2900/1950/2400-5300/2200/2500 MM (LWH)



HYDRAULIC DRIVE

1. CUTTING CHAMBER - 2100 TO 3000 MM
2. MOTOR POWER - 220+ 320 TO 264-500 KW
3. FEED PORT DIMENSION - 2400/2000 TO 3200/2000 MM
4. DISCHARGE HEIGHT 950 MM.
5. DIMENSION - 4800/3400/2600 TO 5800/3400/2550 MM (LWH)

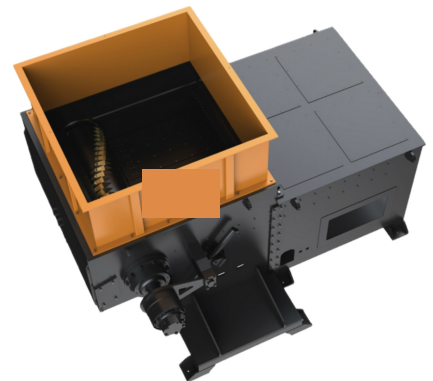



FOOD ENERGY EFFICIENT
EURONEO FOOD ENERGY AND RECYCLE PVT. LTD.

DOUBLE SHAFT SHREDDERS

RANGE OF RECYCLE

VEHICLE - METAL DRUM - WASTE STEEL - TIRE - WASTE
RADIATOR - LITHIUM BATTERY - MUNICIPAL SOLID WASTE
- WASTE REFRIGIRATOR/WM/DW

Typical Application Range






FOOD ENERGY EFFICIENT
EURONEO FOOD ENERGY AND RECYCLE PVT. LTD.

STRUCTURE SHREDDERS

1. BODY FRAME
2. MAINFRAME BOX
3. SHREDDER SPINDLE
4. BLADE
5. GEAR BOX
6. MOTOR
7. FEED HOPPER
8. DISCHARGE HOPPER

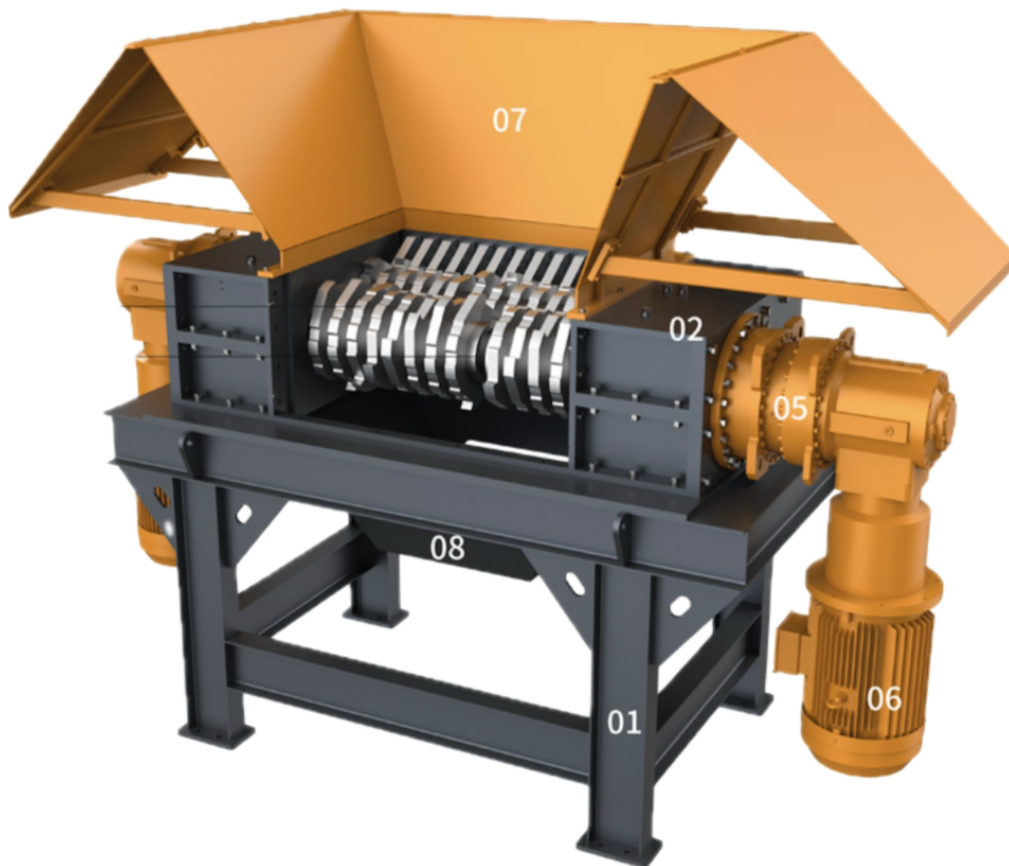





FOOD ENERGY EFFICIENT
EURONEO FOOD ENERGY AND RECYCLE PVT. LTD.

STRUCTURE SHREDDERS



SPINDLE ASEMBLY

BLADE

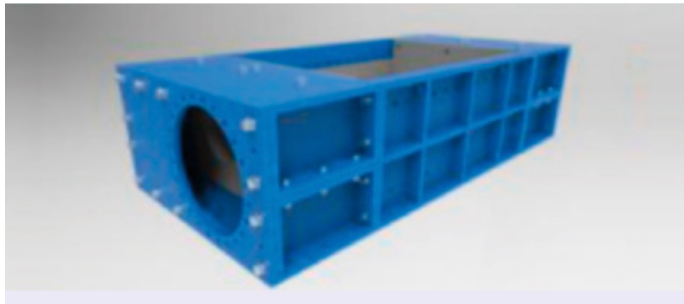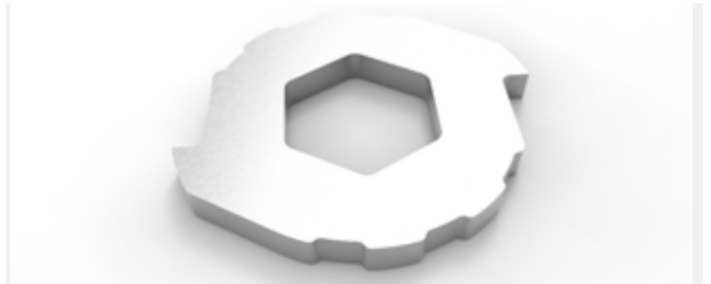

MAINFRAME BOX

GEARBOX





FOOD ENERGY EFFICIENT
EURONEO FOOD ENERGY AND RECYCLE PVT. LTD.

DOUBLE SHREDDERS

LIGHT TYPE

1. BLADE DIE - 200 TO 380 MM
2. BLADE THICKNESS - 20 TO 50 MM
3. CUTTING CHAMBER - 400X400 TO 1400 X 800 MM
4. MOTOR POWER - 5.5 - 7.5 TO 60-74 KW
5. FEED PORT DIMENSION - 1200/900 TO 3000/1500 MM
6. DIMENSION - 1100/540/1250 TO 3550/1950/3200 MM (LWH)
7. WEIGHT - 500 TO 6350 KG.

MEDIUM TYPE

1. BLADE DIE - 430 TO 510 MM
2. BLADE THICKNESS - 50 TO 80 MM
3. CUTTING CHAMBER - 1000X900 TO 1800 X 1000 MM
4. MOTOR POWER - 74 - 90 TO 110-150 KW
5. DIMENSION - 3500/1550/2800 TO 4820/1800/3260 MM (LWH)
6. WEIGHT - 7500 TO 15500 KG.

HEAVY TYPE

1. BLADE DIE - 650 TO 800 MM
2. BLADE THICKNESS - 60 TO 100 MM
3. CUTTING CHAMBER - 1400X1300 TO 2000 X 1600 MM
4. MOTOR POWER - 150 - 180 TO 180-220 KW
5. DIMENSION - 4700/2600/3500 TO 5800/2800/3800 MM (LWH)
6. WEIGHT - 19000 TO 38000 KG.

HYDRAULIC TYPE

1. BLADE DIE - 650 TO 980 MM
2. BLADE THICKNESS - 70 TO 150 MM
3. CUTTING CHAMBER - 1400X1300 TO 2000 X 3000 MM
4. MOTOR POWER - 150 - 300 TO 300-500 KW
5. DIMENSION - 6800/2800/3500 TO 10000/3000/4200 MM (LWH)
6. WEIGHT - 23000 TO 58000 KG.



FOOD ENERGY EFFICIENT
EURONEO FOOD ENERGY AND RECYCLE PVT. LTD.

FOUR SHAFT SHREDDERS

RANGE OF RECYCLE

1. STEEL/IRON HOUSE HOLD
2. HDPE/PVC DRUM
3. HEAVY DEVICE
4. FURNITURE






FOOD ENERGY EFFICIENT
EURONEO FOOD ENERGY AND RECYCLE PVT. LTD.

STRUCTURE SHREDDERS



1. RACK
2. BOX
3. MAIN BLADE
4. AUXILIARY BLADE
5. SCREEN
6. GEAR BOX
7. MOTOR
8. FEED HOPPER
9. DISCHARGE HOPPER

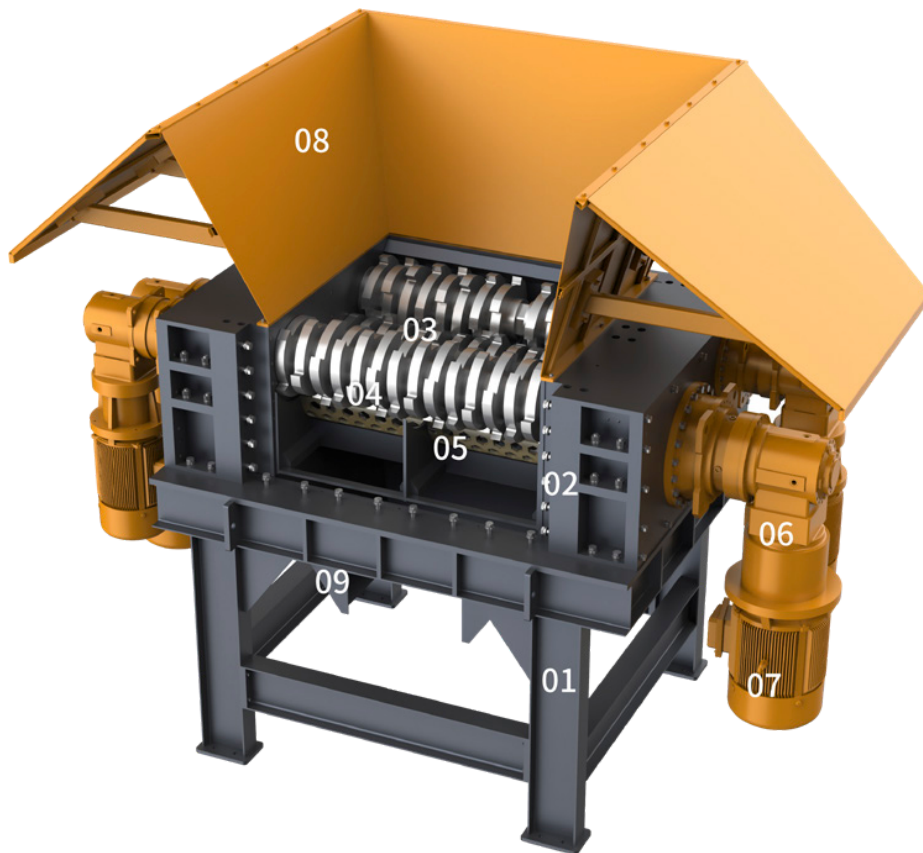



FOOD ENERGY EFFICIENT
EURONEO FOOD ENERGY AND RECYCLE PVT. LTD.

STRUCTURE SHREDDERS

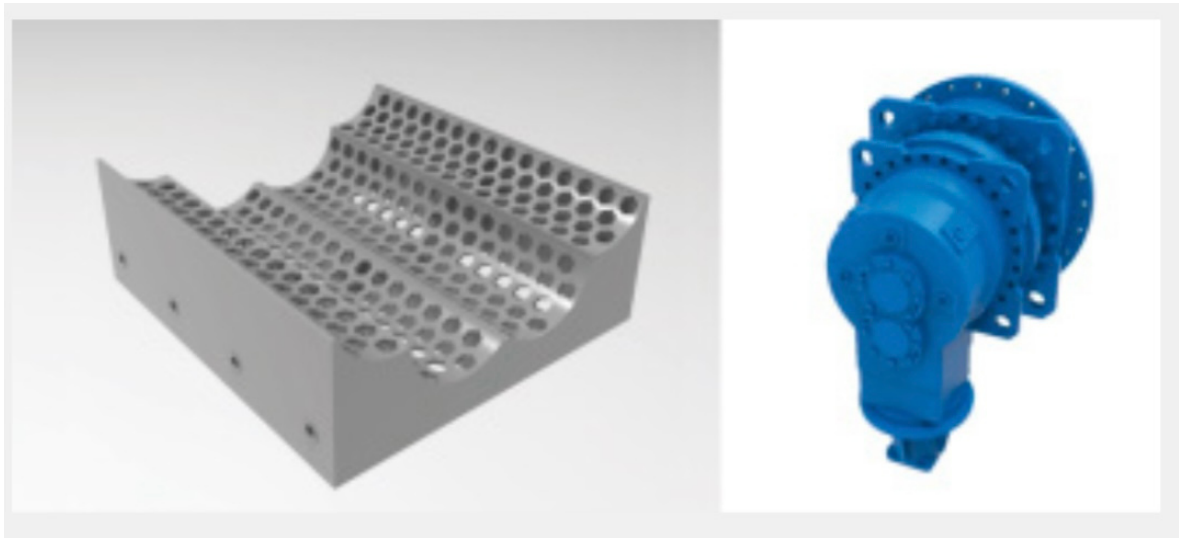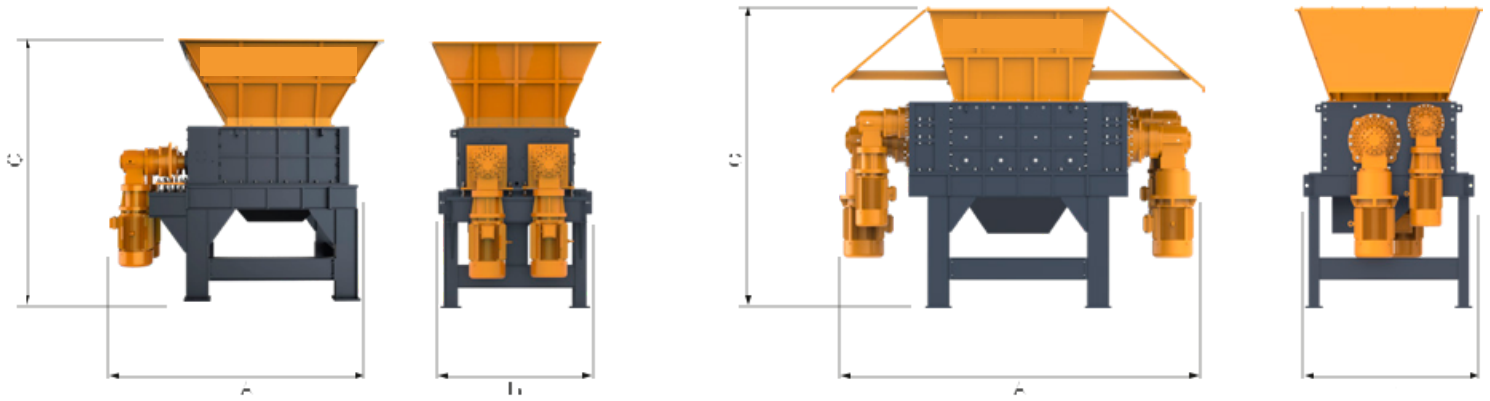

SCREEN - GEAR BOX



FOOD ENERGY EFFICIENT
EURONEO FOOD ENERGY AND RECYCLE PVT. LTD.

FOUR SHREDDERS

MEDIUM TYPE

1. BLADE DIE - 290 TO 320 MM
2. MAIN SHAFT SPEED - 15~25
3. BLADE THICKNESS - 25 TO 40 MM
4. BLADE QUANTITY - 32*2 TO 35*2
5. CUTTING CHAMBER - 900X800 TO 1000 X 1400 MM
6. MOTOR POWER - 44 TO 60 KW
7. DIMENSION - 2400/1550/2500 TO 3300/1700/2800
MM(LWH)
8. WEIGHT - 4700 TO 7600 KG.

HEAVY TYPE

1. BLADE DIE - 430 TO 510 MM
2. MAIN SHAFT SPEED - 10~15
3. BLADE THICKNESS - 50 MM
4. BLADE QUANTITY - 24*2 TO 40*2
5. CUTTING CHAMBER - 1300X1200 TO 1600 X 2000 MM
6. MOTOR POWER - 104 TO 230 KW
7. DIMENSION - 4100/2000/3100 TO 5200/2300/3600
MM(LWH)
8. WEIGHT - 15600 TO 25000 KG.





FOOD ENERGY EFFICIENT
EURONEO FOOD ENERGY AND RECYCLE PVT. LTD.

HAMMER CRUSHER

THE CRUSHER ADOPTS HAMMER TYPE UNDER HIGH SPEED DRIVE. THE HAMMER ON THE MAIN ROTOR HIT THE MATERIALS ENTERING THE MACHINE IN TURN, TEARING THE MATERIAL INTO SIZES FOR SORTING.

SUITABLE FOR: LITHIUM BATTERIES, TRANSFORMER, MICRO MOTORS, ALUMINIUM IRON, COPPER SCRAP METALS

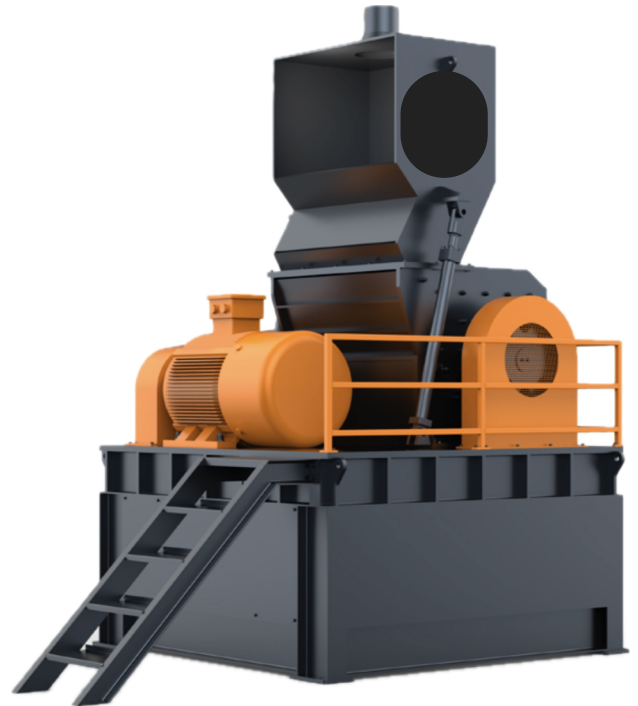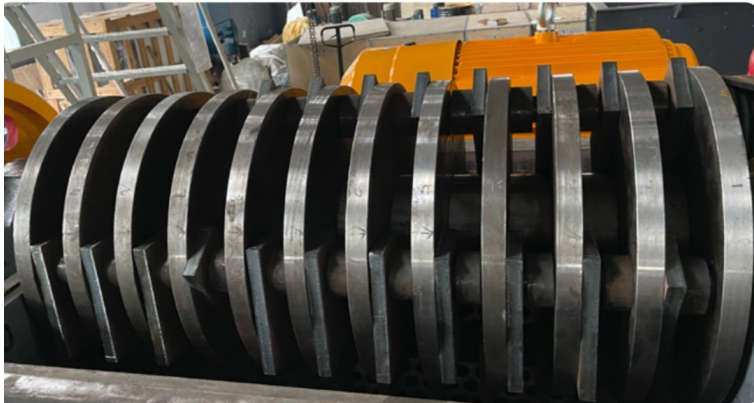

1. POWER - 30-55 TO 132-220 KW.
2. CRUSHING CHAMBER WIDTH - 650 - 1600 MM